


## GW-134-20 Programmable Twist-lock Electronic Type Photocontrol

### TECHNICAL SPECIFICATIONS


<b>Standard</b>	ANSI C136.10 & UL773/ROHS Complaint
<b>UL File No.</b>	E499652
<b>Rated Volts</b>	120V-277V (Support: 105-305V)
<b>Frequency</b>	50-60 Hz
<b>Rated Load</b>	1800VA driver or ballast load
<b>LED Rating</b>	8A E-Ballast
<b>Turn-On Light Levels</b>	1.5 +/-0.3fc, Turn-ON light levels standard level
<b>Turn-Off Light Levels</b>	1.5 +/-0.3fc, Turn-ON light levels standard level (setting of any fc levels is programmed at manufacturer.)
<b>Time Delay</b>	On/Off Ratio: 2-5 second time delay
<b>Operating Temperature</b>	-40°C to +70°C
<b>Switch</b>	> 10000 ON/OFF Operations at Rated Load
<b>Ingress Protection</b>	IP65
<b>Surge Protection</b>	880J
<b>Light Sensor</b>	IR Filter Phototransistor
<b>Power Consumption</b>	≤ 0.7 watts at 120VAC
<b>Cover</b>	Anti-UV Impact Resistant Polycarbonate (PC)
<b>Base</b>	High Temperature Resistant Polybutylene Terephthalate (PBT)
<b>Fail Mode</b>	FAIL ON



### DIMENSIONS

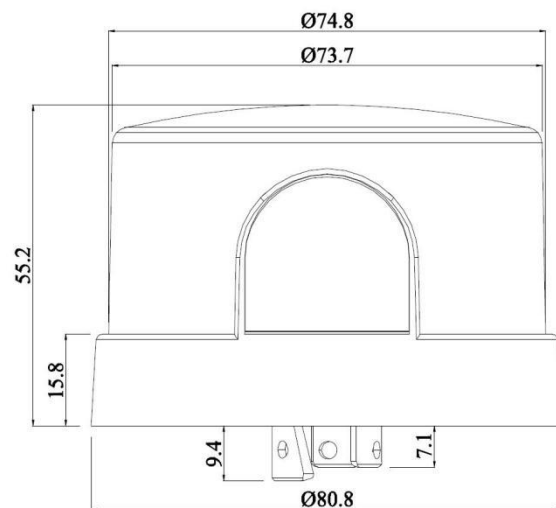

### WIRING DIAGRAM

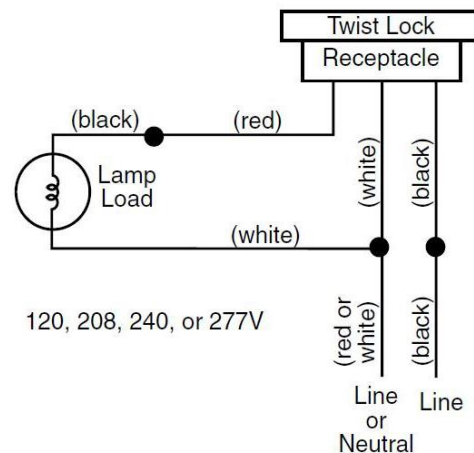

### WARRANTY:

**10 year warranty** - All photocontrols are marked with date of manufacture. This product is warranted to operate within its original specifications and shall be free of electrical or mechanical defects. Consult factory for the warranty time period. Manufacturer's warranty shall be limited to providing a replacement control of same type and shall not cover costs of removal, replacement or loss of service nor any consequential damages. This warranty is in lieu of and excludes all other warranties either expressed or implied. Full warranty statement is available by consulting factory.