

GW-210 SERIES RECEPTACLES

DESCRIPTION

The GW-210 series receptacles are designed for use with luminaires without an ANSI C136.10-1996 receptacle. There is an external wire and twist lock support for wall-mounting purposes

- Heat-resistant, flame-retardant materials
- Internal copper contacts
- Maximum voltage: 480VAC
- GW-210N and GW-210K equipped with rubber gaskets and a waterproof cap



GW-210




GW-210



Technical Data

Model No.	GW-210 GW-210N	GW-210K
Applicable Volt Range	0-480VAC	
Rated Frequency	50/60Hz	
Ambient Temperature	-40°C - +80°C	
Related Humidity	99%	
Maximum Power	10A	
Matching accessories	AL6	
Weight (approx.)	90g	100g

10/26/2018

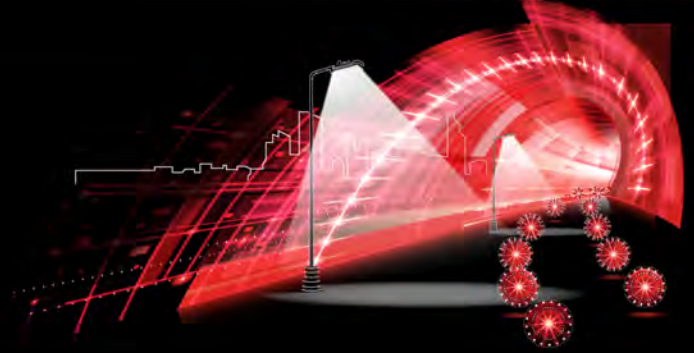

Installation

Disconnect the power and wire the receptacle according to the diagram at right. Install the photocontrol facing NORTH. Adjust the receptacle if necessary. Drilling template available upon request

